




Gardenreet® Premium Brass Landscape Lighting  
Brass Spotlight – Classic Model: Spotlight-2101

## Solid Brass Spotlight

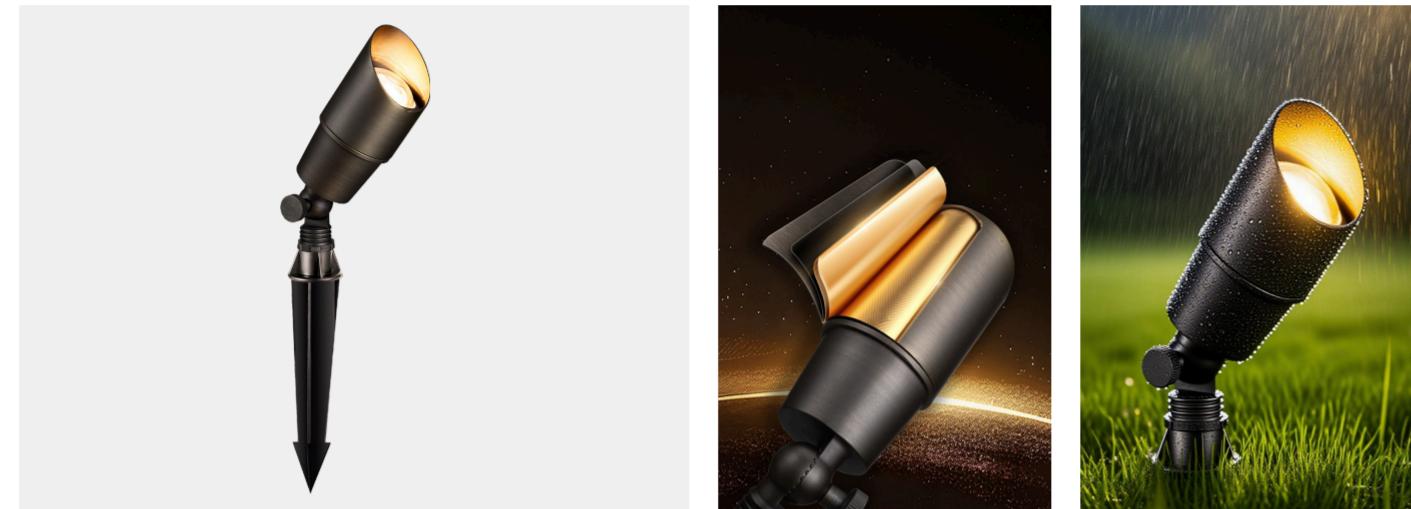

Solid Brass | Lifetime Warranty | Replaceable Bulb

### WARRANTY & CERTIFICATION



### PRODUCT DESCRIPTION

Constructed from premium **solid brass**, this fixture delivers exceptional **corrosion resistance** and long-term durability in demanding outdoor environments. The fixture design supports **MR16 bulbs**, allowing easy replacement without discarding the entire fixture. Featuring weatherproof seals and a bronze finish, this light offers reliable performance for tree, wall, flag, and statue accents throughout the year.

### FEATURES & BENEFITS

- Solid Brass Construction**  
Rust-proof, corrosion-resistant, UV-resistant bronze finish that won't fade over time.
- IP65 Waterproof**  
Well-sealed Silicone O-ring. Keeps water and dusts out.
- Replaceable Bulb Design**  
Supports halogen or LED MR16 bulbs.
- Easy to Install**  
Quick wire connectors for easy installation.
- 9-17V Low Voltage**  
Safe for kids and pets. Worry-free outdoor living.
- Flexible Adjustment**  
The head is 180° adjustable, allowing for precise aiming of the 45° beam.
- Shockproof Glass Lens**  
Fastened with rust proof screws.




Gardenreet® Premium Brass Landscape Lighting  
Brass Spotlight – Classic Model: Spotlight-2101


### PRODUCT SPECIFICATIONS

- Construction:** Solid Brass
- Finish:** Antique Bronze
- Socket Type:** GU5.3
- Wattage:** 5W
- Voltage:** 9-17V AC/DC
- Waterproof Rating:** IP65
- Operating Temperature:** -40°F to 104°F
- Lens:** Glass
- Lead Wire:** 6' 18AWG
- Mounting:** Ground Mount
- Compatible Transformer:** Low Voltage 12V Landscape Transformer (Not Included)

### PRODUCT DIMENSIONS

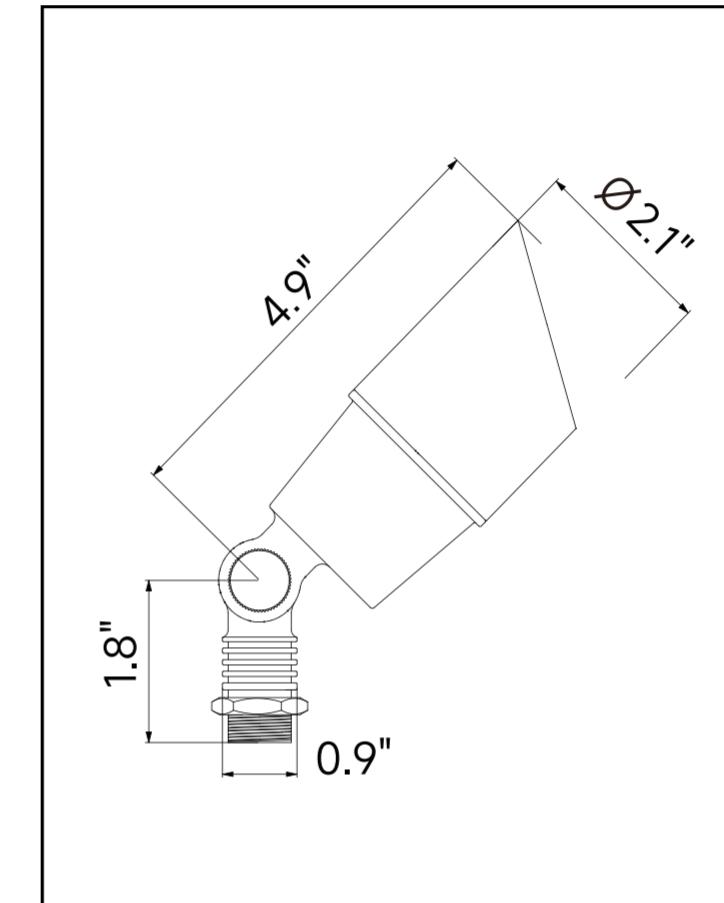

### BASIC COMPONENTS INCLUDED

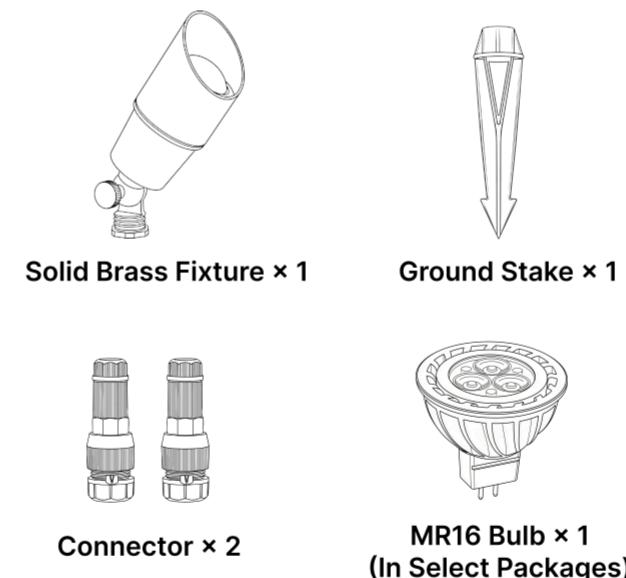

### ELECTRICAL FEATURES

The fixture uses **UL-certified 18AWG brass-shrouded wiring** with tinned copper ends for enhanced corrosion resistance. Compatible with both halogen and **LED MR16 bulbs**, it supports up to **50W output** and ensures stable performance across **AC/DC 12V** systems.